


IN-WALL LADDER INSTALLATION

1. Determine the In-Wall Ladder location on your pool installation.
2. Place the In-Wall Ladder in the opening in the wall panels.
The In-Wall ladder HS402 is 46" in height. Therefore, to install properly, you must dig an additional 4" deeper at the ladder location.
The In-Wall ladder HS402N is 42" in height, therefore install like a wall panel.
3. Properly level the In-Wall Ladder horizontally and vertically.
Check to make sure it is plumb with the flanking wall panels.
4. To insure proper installation, clamp the In-Wall Ladder to the flanking wall panels. This will allow proper wall and drilling alignment.
5. Pour a concrete bond beam at the base at the same time the beam is poured around wall and brace system.
6. Backfill the cavity with granular material to achieve maximum compacting. Do not use clay, dirt, soil or other earthen materials for backfill. This material will not compact properly, leaving hollow cavities which will weaken over time.

*NOTE: Warranty will be void if not backfilled properly.

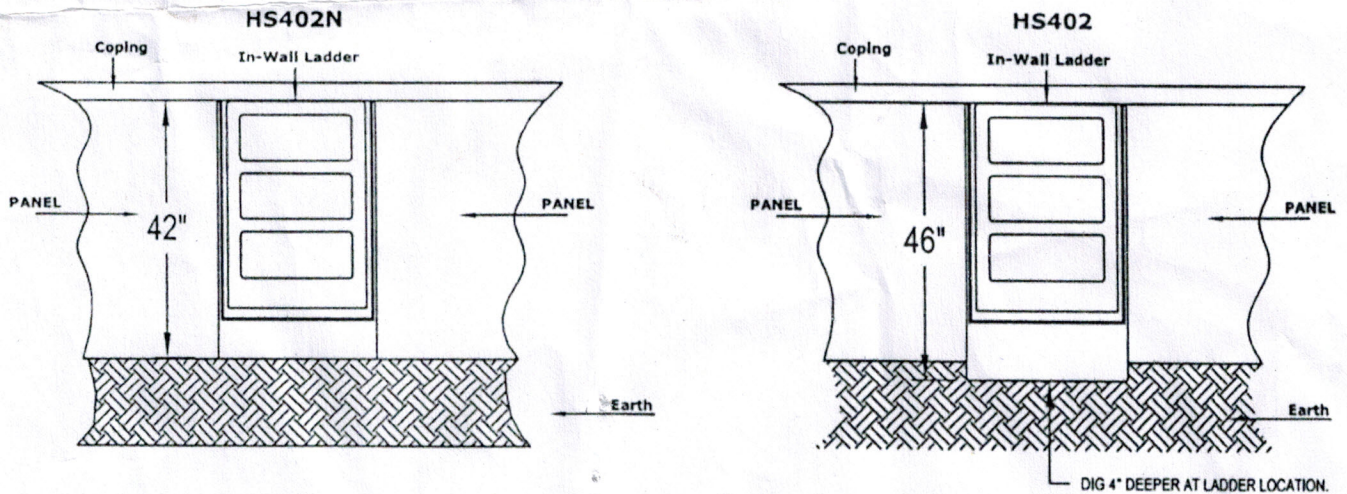

Rev Level: D
Rev Date: JUNE 01 2012
Doc. ID: HM304, Step, Cozy
Cove/Swimout, In-Wall Ladder installation